



NORANDEX™

VINYL SIDING, SOFFIT & ACCESSORIES

2018 FULL LINE OF VINYL SIDING, SOFFIT & ACCESSORIES



WWW.NORANDEX.COM

CONTENTS

QUALITY STORY 3

FEATURES & BENEFITS 4-5

VINYL SIDING PRODUCTS

Rustic Hill® 6-7

Polar Wall® Plus! 8-9

Sagebrush® 10-11

Great Barrier® 12-13

Board & Batten 14-15

Cedar Knolls™ 16-17

The Brushstroke® Collection 18-19

Woodsman Select 20-21

Summit Manor® 22-23

VINYL SOFFIT PRODUCTS

Vinyl Soffit Benefits 24

Beaded Porch Panel 25

Double 5" Premium Vinyl Soffit 26

Double 5" Select Vinyl Soffit 27

Triple 4" Matte Vinyl Soffit 28

Triple 4" Select Vinyl Soffit 29

VINYL ACCESSORIES & COLOR AVAILABILITY

Vinyl Accessories 30-31

Color Availability 32-33

Finishing Touches 34

GENERAL INFORMATION

Product Specifications 35



Homeowners have numerous cladding choices when it comes to finishing the exterior of their home.

They often rely on the expertise of their new construction or remodeling contractor for recommendations on the best materials to use. Consumers want a finish that makes their home stand out in the neighborhood, but also one that will stand up under extreme weather conditions. They want peace of mind knowing the exterior will retain its beauty years down the road, with virtually no maintenance, and is strongly warranted for customer satisfaction.

Homeowners know meeting these requirements is not too much to ask. And, if you ask professional contractors from around the country for their recommendation, many would choose Norandex brand vinyl siding products. That's because Norandex Vinyl Siding offers homeowner preferred choices in styling and performance.

Because of the varying weather patterns throughout the states, Norandex offers both insulated and uninsulated vinyl siding. Products that won't fade when exposed to sunshine, that help insulate a home from winter's chills,

and will stay on the wall in areas prone to extremely high winds.

An assortment of truly distinctive profiles in combination with a wide array of beautiful colors, enables homeowners to create that perfect exterior finish they've always dreamed about. The availability of solid vinyl soffit and accessories not only help accentuate the home, they are also low maintenance products complementing the siding selection.

And, all Norandex Vinyl Siding products carry one of the strongest homeowner warranty packages available in the industry...A Limited Lifetime Transferable Warranty with ColorHold® Lifetime Fade Protection.



FEATURES & BENEFITS

CUSTOMERS FIRST, QUALITY SECOND TO NONE.

New construction and remodeling contractors place their trust in Norandex solid vinyl siding products.

That's because when a contractor's reputation is on the line they turn to the line that's known for quality...Norandex.

Products that are manufactured to the highest quality standards with innovative features not available in other competitive brands.

The NORANDEX Proprietary **NailRIGHT™** SIDING INSTALLATION SYSTEM

An Innovation in Installation.

For a vinyl siding application that's installed right, there's **NailRIGHT®**.

Nailing the **WRONG** Way:

- Can damage wiring and plumbing between studs
- Can lead to blow-off when panels are not securely attached to studs
- Can use too many nails—increase costs, reduce productivity

The **NailRIGHT** Way:

- Helps installers find studs quickly and easily
- Helps ensure siding is attached securely to studs
- Helps ensure the right number of nails are used
- Faster project completion
- Better looking installations
- Fewer callbacks



REDUCES RISK OF BLOW OFFS.




REDUCES RISK OF HIDDEN DANGERS.



REDUCES NUMBER OF NAILS USED.



REDUCES OVERALL JOB COSTS.

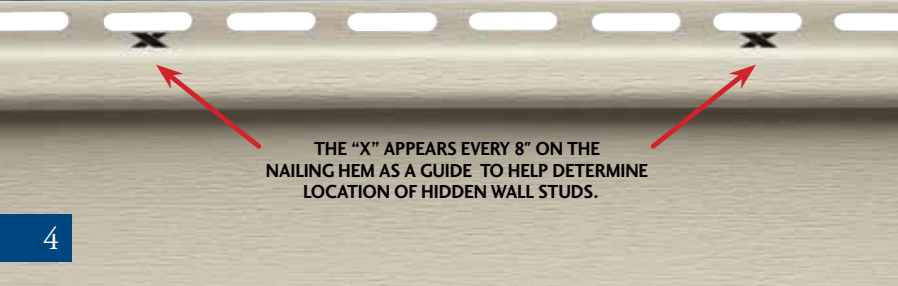

THE "X" APPEARS EVERY 8" ON THE NAILING HEM AS A GUIDE TO HELP DETERMINE LOCATION OF HIDDEN WALL STUDS.



XLok® Technology features a reinforced nail hem and the **NailRIGHT**® Siding Installation System.

Together they help provide a quality installation that's properly applied and firmly affixed to the wall.



For areas prone to adverse weather conditions, Norandex offers vinyl siding

engineered for excellent wind load performance, that's been tested to withstand hurricane force winds.




Norandex Vinyl Siding colors feature a tough surface based on engineered polymer compounds that resist fading. Specify the most brilliant and rich hues with absolute confidence.



The Norandex vinyl manufacturing process has earned the impressive mark of ISO 9001 through DNV-GL - Business Assurance USA, Inc.



A beautiful collection of darker, richer colors with tremendous homeowner appeal that features **ColorHold**® technology to resist fading and discoloring.



Home Innovation
NGBS GREEN CERTIFIED™
RESOURCE EFFICIENCY

Norandex Vinyl Siding products have been NGBS GREEN CERTIFIED in accordance with criteria established by Home Innovation Labs for use in buildings seeking NGBS Green Home Certification. For more information, visit www.HomeInnovation.com/GreenProducts.



Norandex Vinyl Siding products carry one of the strongest homeowner protection warranties in the industry—A Limited Lifetime Transferable Warranty with ColorHold® Lifetime Fade Protection. Visit www.Norandex.com for complete warranty details.



Norandex Vinyl Siding is proudly made in the U.S.A. to the highest American quality standards by trained and skilled professionals.



Norandex Vinyl and insulated Vinyl Siding certified through VSI's Program are verified by a third-party, accredited inspection agency to meet or exceed the long-standing, accepted ASTM industry standards for quality. Colors that have been certified through VSI's Program must meet or exceed ASTM color retention requirements. Consult the VSI website at www.VinylSiding.org for a current list of certified products and colors.

7" Traditional Shake



7" TRADITIONAL SHAKE

7" exposure per panel
80-3/8" long (exposed length)
81-1/4" long (overall length)
13 pcs. per ctn.
1/2 square per ctn.

- ▶ Durable polymer construction for strength and durability
- ▶ Variable, self-aligning nail slots for a straight, secure installation and proper adherence to the wall for weather related expansion and contraction
- ▶ Self-concealing side tabs, with no visible overlaps, for a natural looking finish, with a temperature chart to optimize installation in any weather
- ▶ Extreme weather protection - virtually unaffected by extreme heat or cold and tested to withstand hurricane force winds

5" Double-course Cape Cod Shingle




5" DOUBLE-COURSE CAPE COD SHINGLE

10" exposure per panel (interlocked)
64-1/8" long (exposed length)
67-3/16" long (overall)
11 pcs. per ctn.
1/2 square per ctn.

- ▶ Realistic-looking cedar woodgrain appearance
- ▶ 9/16" Panel projection provides rigidity and casts deep, appealing shadow lines
- ▶ Available in two styles:
 - 7" Traditional Shake -
 - .085" panel thickness
 - Deep cedar woodgrain texture
 - 6'-8" Extended length panel
 - Reinforced nailing hem
 - 5" Double-course Cape Cod Shingle -
 - .075" panel thickness
 - Uniform cedar woodgrain texture

Xtra Benefits

1. Continuous Panel Lock
2. Self-Aligning Nail Slots
3. Temperature Chart
4. Self-Concealing Side Tabs

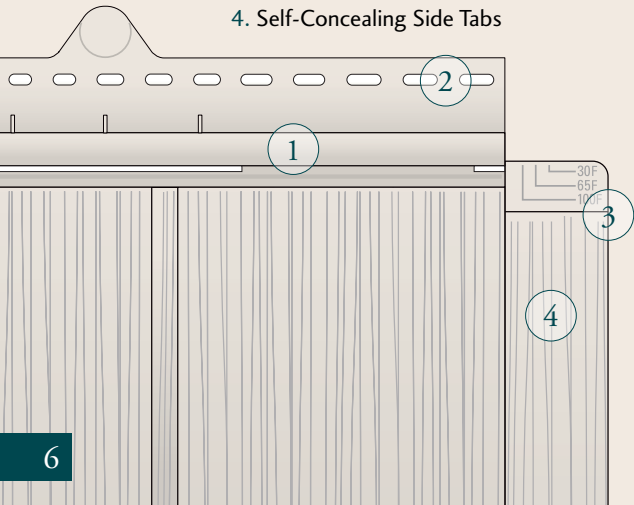

- ▶ Matching and contrasting soffit and accessories
- ▶ Limited Lifetime Transferable Warranty
- ▶ Won't blister, crack, flake, peel or rot like wood exteriors

Product specifications on page 35 do not reflect Rustic Hill specs. A Certificate of Conformance is available upon request.

Deep Cedar Woodgrain Pattern (Traditional)



Profile & Color Shown: Traditional, Cream

25 HOMEOWNER PREFERRED COLORS

Colors are mechanically reproduced. For color accuracy, please see actual product sample.

Polar Wall Plus!

INSULATED SIDING SYSTEM



Dutchlap

Clapboard

DOUBLE 4" CLAPBOARD

2-4" exposure per panel
12' 6" long
12 pcs. per ctn.
1 square per ctn.

DOUBLE 5" DUTCHLAP

2-5" exposure per panel
12' long
10 pcs. per ctn.
1 square per ctn.

DOUBLE 6" CLAPBOARD

2-6" exposure per panel
12' 6" long
8 pcs. per ctn.
1 square per ctn.

*THE TEST PRESSURES LISTED ON NORANDEX VINYL SIDING ARE DERIVED FROM TESTING PER ASTM D-5206 WITH NAILS 16" ON CENTER. THE REPORTED WIND SPEEDS ARE CALCULATED UNDER ONE SET OF CONDITIONS. PLEASE CHECK WITH YOUR LOCAL BUILDING INSPECTOR FOR WIND LOAD REQUIREMENTS IN YOUR AREA AND FOR THE TYPE OF STRUCTURE IN WHICH THE SIDING IS BEING INSTALLED.

- ▶ **XLok**® Technology combines the **BearHug**® Lock, a Superior Full Reversed Rolled-Over Nail Hem that doubles the thickness of the panel where it's nailed to the wall, and the Norandex proprietary **NailRIGHT**® Siding Installation System for an installation that's secure and accurate
- ▶ Thick insulating foam helps reduce energy loss through walls and studs, repel insects, reduce sound transmission and is permeable
- ▶ .046" Panel thickness with a low gloss natural cedar woodgrain pattern
- ▶ Wind load, test pressure 54 psf, 193 mph*
- ▶ Available in three styles:
 - Double 4" Clapboard, 3/4" panel projection
 - Double 5" Dutchlap, 3/4" panel projection
 - Double 6" Clapboard, 5/8" panel projection
- ▶ Matching and contrasting soffit and accessories
- ▶ Limited Lifetime Transferable Warranty with **ColorHold**® Lifetime Fade Protection



OVER TIME, THE SEAMS ON REGULAR VINYL TEND TO OPEN UP BECAUSE THERE IS NOTHING TO SUPPORT THE SIDING.



LAMINATED FOAM PROVIDES EXCELLENT SUPPORT TO THE POLAR WALL PLUS! EXTERIOR SYSTEM, SO THE SEAMS REMAIN PRACTICALLY INVISIBLE.



The **BearHug** locking system includes a rolled-over double nail hem and 3/4" panel projection† for excellent wind load resistance.

†5/8" panel projection available on D6 panel.





Profile & Color Shown: Double 6," White

21 HOMEOWNER PREFERRED COLORS

Colors are mechanically reproduced. For color accuracy, please see actual product sample.

*Available in D6 profile only. See color availability matrix on page 32.

ACCESSORIES THAT ENHANCE THE BENEFITS OF THE POLAR WALL® PLUS! EXTERIOR SYSTEM

6" OUTSIDE CORNER POST



3-1/2" OUTSIDE CORNER POST



THESE ACCESSORIES ARE AVAILABLE WITH FOAM FOR ADDED RIGIDITY AND ENERGY EFFICIENCY.

ADDITIONAL WARRANTY COVERAGE ON FOAM

Structural lamination integrity and thermal performance of **Polar Wall Plus!** laminated foam is warranted for twenty (20) years.

FOAM SPECIFICATIONS

- **DENSITY:** Nominal 1.0 pound per cubic foot (Test method ASTM C-303).
- **FLAMMABILITY:** **Polar Wall Plus!** laminated foam is fabricated using modified expandable polystyrene, treated with a fire retardant chemical, and will not support combustion. Although "Modified EPS" contains a flame-retardant agent, it is an organic material and should therefore be considered flammable if exposed to an open flame or ignition source.
- **WATER PERMEABILITY:** Not less than 5.0 perm/inch maximum (Test method ASTM E-96).
- Polystyrene breathes and is not a vapor barrier.
- **WATER ABSORPTION:** Less than 4.0% by volume (Test method ASTM C-272).
- **CAPILLARITY:** None



PHYSICAL DATA

POLYSTYRENE THICKNESS (NOMINAL)

- Double 4" Clapboard 1-1/8"
- Double 5" Dutchlap 1-1/8"
- Double 6" Clapboard 1-1/4"

LONG-TERM THERMAL PERFORMANCE

"R-VALUE"

- Double 4" Clapboard 2.34
- Double 5" Dutchlap 2.42
- Double 6" Clapboard 2.48

The "R"-Value of all profiles in the **Polar Wall Plus!** Exterior System when tested in accordance with ASTM D1363 exceed the ASTM D7794 standard specifications for insulated siding established by the Vinyl Siding Institute. A product's "R"-Value is a measure of the thermal resistance. The higher the "R"-Value, the better the insulation's effectiveness.

THERMAL EXPANSION

Expanded polystyrene is highly compatible with vinyl siding due to their nearly identical coefficients of expansion and contraction. Coefficient of thermal expansion is .000035 in./in./degreeF. Vinyl siding will range from .000031 to .000036 in./in./degreeF.

SAFE TO USE

The **Polar Wall Plus!** Exterior System is environmentally friendly and fully recyclable. They are constructed from inert organic materials and contain no CFC's, HCFC's or Formaldehyde.



Clapboard

Dutchlap

**DOUBLE 4"
CLAPBOARD**

2-4" exposure per panel
12' 6" long
12 pcs. per ctn.
1 square per ctn.

**DOUBLE 5"
DUTCHLAP**

2-5" exposure per panel
12' long
10 pcs. per ctn.
1 square per ctn.



- ▶ **XLok®** Technology combines the **Railock®** Locking System, a Patented Nailing Hem with Parallel Nailing Slots and Hammer Stop, and the Norandex proprietary **NailRIGHT®** Siding Installation System, for an installation that's secure and accurate
- ▶ .050" Panel thickness with a natural brushed pattern
- ▶ Wind load, test pressure 70.9 psf, 222 mph*
- ▶ 3/4" Panel projection
- ▶ Available in two styles:
 - Double 4" Clapboard
 - Double 5" Dutchlap
- ▶ Matching and contrasting soffit and accessories
- ▶ Limited Lifetime Transferable Warranty with **ColorHold®** Lifetime Fade Protection




THE PATENTED SAGEBRUSH NAIL HEM HAS A BUILT-IN HAMMER STOP THAT INHIBITS NAILS FROM BEING DRIVEN TOO TIGHTLY.



THE EXCLUSIVE SAGEBRUSH STAPLE GUIDE PERMITS QUICK AND EASY STAPLING THROUGH DUAL PARALLEL NAIL SLOTS.

RAILOCK™
LOCKING SYSTEM

The **Railock** Locking System combined with superior rigidity of the panel and heavy duty extended return leg ensure easy, secure locking of panels.



OTHER VINYL SIDINGS DON'T HAVE THE STRENGTH OR RIGIDITY TO SUPPORT THEMSELVES LIKE SAGEBRUSH.

*THE TEST PRESSURES LISTED ON NORANDEX VINYL SIDING ARE DERIVED FROM TESTING PER ASTM D-5206 WITH NAILS 16" ON CENTER. THE REPORTED WIND SPEEDS ARE CALCULATED UNDER ONE SET OF CONDITIONS. PLEASE CHECK WITH YOUR LOCAL BUILDING INSPECTOR FOR WIND LOAD REQUIREMENTS IN YOUR AREA AND FOR THE TYPE OF STRUCTURE IN WHICH THE SIDING IS BEING INSTALLED.





Profile & Color Shown: Double 5" Dutchlap, White

12 HOMEOWNER PREFERRED COLORS

WHITE	ALMOND	GRANITE
LINEN	TAN	SILVER
CREAM	TUMBLEWEED	WEDGEWOOD
CHAMPAGNE	COBBLESTONE	IVY
		PREMIUM COLOR

Colors are mechanically reproduced. For color accuracy, please see actual product sample.



TRY THIS BEND TEST AND PROVE TO YOURSELF THAT **SAGEBRUSH** IS THE STRONGEST VINYL SIDING PANEL ON THE MARKET.



Clapboard

Dutchlap

EXTENDED LENGTHS

DOUBLE 4" CLAPBOARD

2-4" exposure per panel
12' 6" long
12 pcs. per ctn.
1 square per ctn.

DOUBLE 4" CLAPBOARD


2-4" exposure per panel
16.66' long
14 pcs. per ctn.
1.555 squares per ctn.

DOUBLE 5" DUTCHLAP

2-5" exposure per panel
12' long
10 pcs. per ctn.
1 square per ctn.

DOUBLE 5" DUTCHLAP

2-5" exposure per panel
16.66' long
12 pcs. per ctn.
1.666 squares per ctn.



- ▶ **XLok®** Technology combines **JawsLock®**, a Superior Full Reversed Rolled-Over Nail Hem that doubles the thickness of the panel where it's nailed to the wall, and the Norandex proprietary **NailRIGHT®** Siding Installation System, for an installation that's secure and accurate
- ▶ .046" Panel thickness with a low gloss natural cedar woodgrain pattern
- ▶ Wind load, test pressure 80 psf, 240 mph*
- ▶ 3/4" Panel projection
- ▶ Available in two styles:
 - Double 4" Clapboard
 - Double 5" Dutchlap
- ▶ Extended 16.66' lengths available
- ▶ Matching and contrasting soffit and accessories
- ▶ Limited Lifetime Transferable Warranty with **ColorHold®** Lifetime Fade Protection



The **JawsLock** locking system has been engineered for faster, straighter installations. Combining a 3/4" panel projection and a curled return leg and an extra heavy duty top-lock.



IN WIND LOAD TESTS, THE DOUBLE THICK GREAT BARRIER HEM WAS STRONG ENOUGH TO BEND THE NAIL HEADS.



UP TO **1/3** FEWER SEAMS

FOR A VIRTUALLY SEAMLESS APPEARANCE, GREAT BARRIER IS AVAILABLE IN EXTENDED 16.66' LENGTHS, WHICH MEANS UP TO 1/3 FEWER VISIBLE SEAMS ON THE ENTIRE SURFACE OF THE HOME.



*THE TEST PRESSURES LISTED ON NORANDEX VINYL SIDING ARE DERIVED FROM TESTING PER ASTM D-5206 WITH NAILS 16" ON CENTER. THE REPORTED WIND SPEEDS ARE CALCULATED UNDER ONE SET OF CONDITIONS. PLEASE CHECK WITH YOUR LOCAL BUILDING INSPECTOR FOR WIND LOAD REQUIREMENTS IN YOUR AREA AND FOR THE TYPE OF STRUCTURE IN WHICH THE SIDING IS BEING INSTALLED.



Profile & Color Shown: Double 4", Russet

22 HOMEOWNER PREFERRED COLORS

WHITE	CREAM	KHAKI	GRAPHITE	GRANITE
LINEN	TUMBLEWEED	MYRTLE	FIREBRICK	SILVER
CHAMPAGNE	MOCHA	OLIVE	STEEL BLUE	PREMIUM COLOR
ALMOND	RUSSET	IVY	WEDGEWOOD	DESIGNER COLLECTION COLOR
TAN	COBBLESTONE	EVERGREEN	SMOKE	

Colors are mechanically reproduced. For color accuracy, please see actual product sample.

Board & Batten

VERTICAL VINYL SIDING



- ▶ A vertical panel for whole house or accent applications
- ▶ The wide flat board is accentuated with a narrow batten, replicating an early American look
- ▶ .052" Panel thickness with a cedar grain pattern
- ▶ Wind load, test pressure 30 psf, 150 mph*
- ▶ 1/2" Panel projection
- ▶ Matching and contrasting soffit and accessories
- ▶ Limited Lifetime Transferable Warranty with **ColorHold®** Lifetime Fade Protection



The .052" thick panel combined with a heavy duty lock ensure a secure installation.



Can be used in whole house applications, or as an accent.

BOARD & BATTEN VERTICAL

7" exposure per panel
10' long
34 pcs. per ctn.
2 squares per ctn.

*THE TEST PRESSURES LISTED ON NORANDEX VINYL SIDING ARE DERIVED FROM TESTING PER ASTM D-5206 WITH NAILS 16" ON CENTER. THE REPORTED WIND SPEEDS ARE CALCULATED UNDER ONE SET OF CONDITIONS. PLEASE CHECK WITH YOUR LOCAL BUILDING INSPECTOR FOR WIND LOAD REQUIREMENTS IN YOUR AREA AND FOR THE TYPE OF STRUCTURE IN WHICH THE SIDING IS BEING INSTALLED.




Color Shown: Sandstone

14 HOMEOWNER PREFERRED COLORS

WHITE	MAVERICK BROWN	GRANITE
SANDSTONE	GRAPHITE	SEAPORT
SIERRA	MYRTLE NEW!	STEEL BLUE
MOCHA	SMOKE	DEEP WATER NEW!
RUSSET	CACTUS	PREMIUM COLOR
		DESIGNER COLLECTION COLOR

Colors are mechanically reproduced. For color accuracy, please see actual product sample.



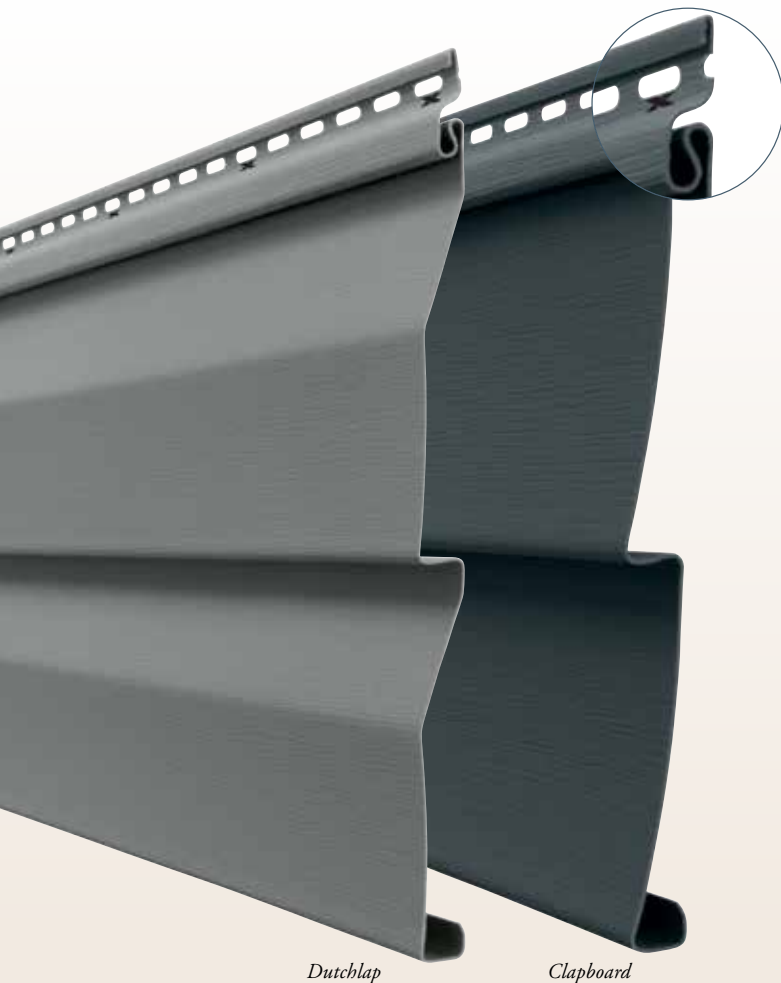

Dutchlap

Clapboard

DOUBLE 4" CLAPBOARD

2-4" exposure per panel
12' 6" long
24 pcs. per ctn.
2 squares per ctn.

**DOUBLE 5" CLAPBOARD
& DOUBLE 5" DUTCHLAP**

2-5" exposure per panel
12' long
20 pcs. per ctn.
2 squares per ctn.



TitanBar™
REINFORCED NAIL HEM

The heavy duty extended return leg snaps tightly into the **TitanBar** Reinforced Nail Hem which is double the thickness of the siding panel under the nail head, for an installation that's solid, secure and protects against panel blow off in adverse weather conditions.

- ▶ **XLok®** Technology combines the **TitanBar®** Reinforced Nail Hem and the **NailRIGHT®** Siding Installation System, two innovations that help ensure the siding is securely interlocked and properly affixed to the wall
- ▶ Natural cedar embossed woodgrain pattern
- ▶ Wind load, test pressure 70.9 psf, 222 mph*
- ▶ Available in three styles:
 - Double 4" & 5" Clapboard - .044" panel thickness
 - Double 5" Dutchlap - .044" panel thickness
- ▶ A 5/8" panel projection provides rigidity and casts deep, appealing shadow lines
- ▶ Matching and contrasting soffit and accessories
- ▶ Limited Lifetime Transferable Warranty with **ColorHold®** Lifetime Fade Protection



*THE TEST PRESSURES LISTED ON NORANDEX VINYL SIDING ARE DERIVED FROM TESTING PER ASTM D-5206 WITH NAILS 16" ON CENTER. THE REPORTED WIND SPEEDS ARE CALCULATED UNDER ONE SET OF CONDITIONS. PLEASE CHECK WITH YOUR LOCAL BUILDING INSPECTOR FOR WIND LOAD REQUIREMENTS IN YOUR AREA AND FOR THE TYPE OF STRUCTURE IN WHICH THE SIDING IS BEING INSTALLED.



Profile & Color Shown: Double 4," Wheat

25 HOMEOWNER PREFERRED COLORS

WHITE	WHEAT	MAVERICK BROWN	MYRTLE <small>NEW!</small>	SMOKE
BEIGE	SANDSTONE	GRAPHITE	OLIVE	SEAPORT
CHAMPAGNE	SIERRA	FIREBRICK	CACTUS	GENEVA BLUE <small>NEW!</small>
CREAM	MOCHA	KHAKI	SILVER	STEEL BLUE
YELLOW	RUSSET	FERN	GRANITE	DEEP WATER <small>NEW!</small>

PREMIUM COLOR
 DESIGNER COLLECTION COLOR

Colors are mechanically reproduced. For color accuracy, please see actual product sample.



Cambridge Beaded

Shenandoah Beaded

Shenandoah T3

CAMBRIDGE BEADED

6-1/2" exposure per panel
12'4" long
30 pcs. per ctn.
2 squares per ctn.

SHENANDOAH BEADED

6-1/2" exposure per panel
12'4" long
30 pcs. per ctn.
2 squares per ctn.

SHENANDOAH TRIPLE 3"

3-3" exposure per panel
12' 1" long
22 pcs. per ctn.
2 squares per ctn.

*THE TEST PRESSURES LISTED ON NORANDEX VINYL SIDING ARE DERIVED FROM TESTING PER ASTM D-5206 WITH NAILS 16" ON CENTER. THE REPORTED WIND SPEEDS ARE CALCULATED UNDER ONE SET OF CONDITIONS. PLEASE CHECK WITH YOUR LOCAL BUILDING INSPECTOR FOR WIND LOAD REQUIREMENTS IN YOUR AREA AND FOR THE TYPE OF STRUCTURE IN WHICH THE SIDING IS BEING INSTALLED.

- ▶ Features the Norandex proprietary **NailRIGHT**[®] Siding Installation System for a safe, secure installation
- ▶ Low gloss brushed pattern
- ▶ Wind load, test pressure 32 psf, 157 mph* (Cambridge Beaded)
Wind load, test pressure 52 psf, 200 mph* (Shenandoah Beaded)
Wind load, test pressure 56 psf, 153 mph* (Shenandoah T3)
- ▶ 5/8" Panel projection
- ▶ Available in three styles:
 - 6-1/2" Cambridge Beaded
 - .044" panel thickness
 - Full Traditional U-Groove beaded design
 - 6-1/2" Shenandoah Beaded
 - .042" panel thickness
 - Sleek Modern U-Groove beaded design
 - Shenandoah Triple 3"
 - .040" panel thickness
- ▶ Matching and contrasting soffit and accessories
- ▶ Limited Lifetime Transferable Warranty with **ColorHold**[®] Lifetime Fade Protection

Profile & Color Shown:
Shenandoah Triple 3", Granite





Profile & Color Shown: Cambridge Beaded, Cream

15 HOMEOWNER PREFERRED COLORS

WHITE	CREAM	CHAMPAGNE
LINEN	WHEAT	CACTUS
BEIGE	SANDSTONE	SILVER
ALMOND	SIERRA	GRANITE
TAN	SAND	WEDGEWOOD

PREMIUM COLOR


Colors are mechanically reproduced. For color accuracy, please see actual product sample.



Profile & Color Shown: Shenandoah Beaded, Silver

Woodman Select

PREMIUM VINYL SIDING

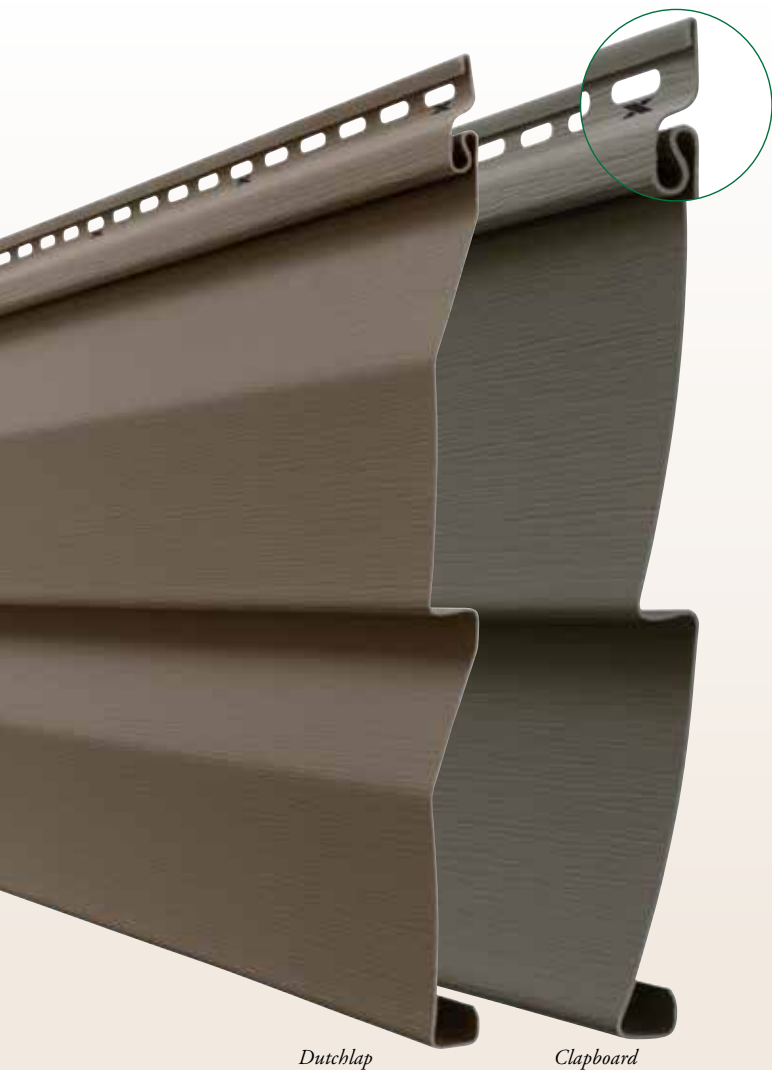

Dutchlap

Clapboard

DOUBLE 4" CLAPBOARD & DOUBLE 4" DUTCHLAP

2-4" exposure per panel
12' 6" long
24 pcs. per ctn.
2 squares per ctn.

DOUBLE 5" CLAPBOARD & DOUBLE 5" DUTCHLAP

2-5" exposure per panel
12' long
20 pcs. per ctn.
2 squares per ctn.



TitanBar™ REINFORCED NAIL HEM

The heavy duty extended return leg snaps tightly into the **TitanBar** Reinforced Nail Hem which is double the thickness of the siding panel under the nail head, for an installation that's solid, secure and protects against panel blow off in adverse weather conditions.

- ▶ **XLok®** Technology combines the **TitanBar®** Reinforced Nail Hem and the Norandex proprietary **NailRIGHT®** Siding Installation System, two innovations that help ensure the siding is securely interlocked and properly affixed to the wall
- ▶ .042" Panel thickness with a low gloss natural cedar woodgrain pattern
- ▶ Wind load, test pressure 53.3 psf, 203 mph*
- ▶ 5/8" Panel projection provides rigidity and casts deep, appealing shadow lines
- ▶ Available in four styles:
 - Double 4" & Double 5" Clapboard
 - Double 4" & Double 5" Dutchlap
- ▶ Matching and contrasting soffit and accessories
- ▶ Limited Lifetime Transferable Warranty with **ColorHold®** Lifetime Fade Protection



*THE TEST PRESSURES LISTED ON NORANDEX VINYL SIDING ARE DERIVED FROM TESTING PER ASTM D-5206 WITH NAILS 16" ON CENTER. THE REPORTED WIND SPEEDS ARE CALCULATED UNDER ONE SET OF CONDITIONS. PLEASE CHECK WITH YOUR LOCAL BUILDING INSPECTOR FOR WIND LOAD REQUIREMENTS IN YOUR AREA AND FOR THE TYPE OF STRUCTURE IN WHICH THE SIDING IS BEING INSTALLED.



Profile & Color Shown: Double 4", Silver

22 HOMEOWNER PREFERRED COLORS

WHITE	TAN	MOCHA	CACTUS	STEEL BLUE
SILVER	SANDSTONE	RUSSET	FERN	WEDGEWOOD
BEIGE	SIERRA	MAVERICK BROWN	GRANITE	
CREAM	KHAKI	GRAPHITE	SMOKE	PREMIUM COLOR
CHAMPAGNE	TUMBLEWEED	OLIVE	SEAPORT	DESIGNER COLLECTION COLOR

Colors are mechanically reproduced. For color accuracy, please see actual product sample.

Summit Manor®

VINYL SIDING



Dutchlap

Clapboard

DOUBLE 4" CLAPBOARD

2-4" exposure per panel
12' 6" long
24 pcs. per ctn.
2 squares per ctn.

DOUBLE 4-1/2" CLAPBOARD & DOUBLE 4-1/2" DUTCHLAP

2-4 1/2" exposure per panel
12' 1" long
22 pcs. per ctn.
2 squares per ctn.

- ▶ Features the Norandex proprietary **NailRIGHT®** Siding Installation System for a safe, secure installation
- ▶ .040" Panel thickness with a low gloss woodgrain pattern
- ▶ Wind load, test pressure 21.7 psf, 129 mph*
- ▶ 1/2" Panel projection
- ▶ Available in three styles:
 - Double 4" Clapboard
 - Double 4-1/2" Clapboard
 - Double 4-1/2" Dutchlap
- ▶ Matching and contrasting soffit and accessories
- ▶ Limited Lifetime Transferable Warranty with **ColorHold®** Lifetime Fade Protection



*THE TEST PRESSURES LISTED ON NORANDEX VINYL SIDING ARE DERIVED FROM TESTING PER ASTM D-5206 WITH NAILS 16" ON CENTER. THE REPORTED WIND SPEEDS ARE CALCULATED UNDER ONE SET OF CONDITIONS. PLEASE CHECK WITH YOUR LOCAL BUILDING INSPECTOR FOR WIND LOAD REQUIREMENTS IN YOUR AREA AND FOR THE TYPE OF STRUCTURE IN WHICH THE SIDING IS BEING INSTALLED.



Profile & Color Shown: Double 4-1/2" Dutchlap, White

18 HOMEOWNER PREFERRED COLORS

WHITE	TAN	MOCHA <small>NEW!</small>	WEDGEWOOD
LINEN	CREAM	SAND	CACTUS
BEIGE	WHEAT	CHAMPAGNE	DOVE GRAY <small>NEW!</small>
YELLOW	SANDSTONE	SILVER	PREMIUM COLOR
ALMOND	SIERRA	GRANITE	

Colors are mechanically reproduced. For color accuracy, please see actual product sample.

Vinyl Soffit

VERTICAL SIDING | PORCH CEILINGS



DOUBLE 5" PREMIUM

DOUBLE 5" SELECT

TRIPLE 4" MATTE

TRIPLE 4" SELECT

BEADED PORCH PANEL

RIDGE VENT (EXHAUST)



SOFFIT VENTS (INTAKE)

Proper attic ventilation is not something that should be overlooked. Excessive moisture build-up can lead to mold and mildew growth, and cause potential damage to a home's wood framing. That's why many homeowners are making the smart choice to have Norandex Premium Vinyl Soffit installed under their overhangs.

Choose from these ventilation system options:

- ▶ Perforated Center Vent
- ▶ Perforated Full Vent
- ▶ Lanced Full Vent
- ▶ Hidden Ridge® features venting slots hidden deep in the U-grooves of the soffit panels. This provides efficient airflow for proper ventilation while maintaining the clean look of solid soffit, and helps reduce heating and cooling costs by helping maintain a more energy-efficient attic temperature.

ADD SOFFIT. ADD VALUE.

Remind homeowners of the significant benefits of adding Norandex Premium Vinyl Soffit to their home.

Porch ceilings and areas under overhangs can be difficult and dangerous to maintain. Norandex low-maintenance vinyl soffit is weather resistant so there's never a need to scrape, sand and paint again, saving time and money on periodic upkeep.

A selection of truly distinctive profiles gives homeowners the option of choosing a soffit panel that best accentuates their exterior finish, including an extra thick Double 5" profile that can be used for vertical applications.

To complement their siding selection, Norandex Vinyl Soffit comes in a variety of beautiful homeowner preferred colors. The soffit can be perfectly matched to the siding for a unified look, or contrasted to add a subtle, appealing highlight.

With weather-resistant Norandex Vinyl Soffit, there's virtually no maintenance ever. This means homeowners can use the extra time and money they save to do the things they truly enjoy.

Beaded Porch Panel

Low Gloss Brushed Pattern



Profile & Color Shown: Solid, White

5 HOMEOWNER PREFERRED COLORS



SOLID & CENTER VENT

8" exposure per panel
12' long
18 pcs. per ctn.
1.44 squares per ctn.

► PREMIUM COLOR

Colors are mechanically reproduced. For color accuracy, please see actual product sample.

*Not available in Center Vent profile.
See color availability matrix on page 32.



SOLID PANELS CAN BE USED IN CEILING APPLICATIONS ON PORCHES AS SHOWN ABOVE TO BEAUTIFULLY FINISH THE EXTERIOR OF A HOME.



Solid

Center Vent

- .040" Panel thickness with a low gloss brushed pattern
- Available solid and center vent styles
- Center vent ventilation specifications:
 - Net free ventilation area per linear foot - 2.0 sq. in.
 - Percentage of ventilated surface area per linear foot - 2.1%
- 3/8" Panel projection
- Solid panels can be used on porch ceilings and as vertical accent pieces
- Limited Lifetime Transferable Warranty with **ColorHold®** Lifetime Fade Protection

D5 Premium


VINYL SOFFIT

Natural Cedar Grain Pattern



Full Vent Lanced

Solid

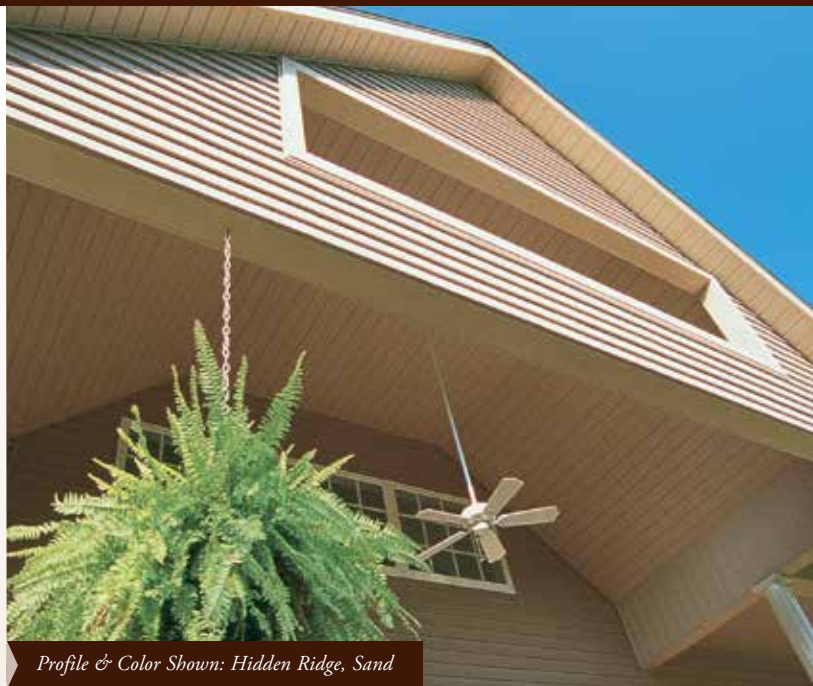

Profile & Color Shown: Hidden Ridge, Sand

23 HOMEOWNER PREFERRED COLORS

WHITE	SAND*	IVY*
LINEN*	SANDSTONE	CACTUS*
BEIGE*	TUMBLEWEED*	FERN*
CHAMPAGNE*	SIERRA	SMOKE*
ALMOND	MOCHA*	GRANITE*
CREAM*	COBBLESTONE*	SILVER*
TAN*	KHAKI*	WEDGEWOOD*
WHEAT	OLIVE*	PREMIUM COLOR

Colors are mechanically reproduced. For color accuracy, please see actual product sample.

*Not available in Full Vent Lanced profile. See color availability matrix on page 32.

- ▶ .048" Panel thickness with a natural cedar grain pattern
- ▶ Available solid, full vent lanced or with the **Hidden Ridge®** ventilation system
- ▶ Wind load, test pressure 46 psf, 138 mph
- ▶ Net free ventilation area per linear foot:
 - Hidden Ridge® - 1.9 sq. in.
 - Full vent lanced - 11.9 sq. in.
- ▶ Percentage of ventilated surface area per linear foot:
 - Hidden Ridge® - 1.60%
 - Full vent lanced - 9.92%
- ▶ 3/4" Panel projection
- ▶ Solid panels can be used in sidewall applications as vertical siding
- ▶ Limited Lifetime Transferable Warranty with **ColorHold®** Lifetime Fade Protection



Hidden Ridge®
VENTING SYSTEM

THE .048" THICKNESS COMBINED WITH THE 3/4" PANEL PROJECTION CREATES A TIGHT SECURE LOCK BETWEEN PANELS AND IS ENGINEERED TO WITHSTAND SAGGING OR BUCKLING, MAKING IT PERFECT FOR LONG-SPAN APPLICATIONS SUCH AS VERTICAL SIDING AND OVERHANGS.

SOLID, FULL VENT LANCED & HIDDEN RIDGE

2-5" exposure per panel
12' long
15 pcs. per ctn.
1.5 squares per ctn.

D5 Select

VINYL SOFFIT

Natural Matte Pattern




Profile & Color Shown: Solid & Full Vent, White

10 HOMEOWNER PREFERRED COLORS

WHITE	ALMOND	SANDSTONE
LINEN	TAN	SAND
BEIGE	WHEAT	SIERRA
Colors are mechanically reproduced. For color accuracy, please see actual product sample.	PREMIUM COLOR	MUSKET BROWN
	DESIGNER COLLECTION COLOR	

Accenting the soffit areas of a home is a great way to finish off the exterior.



H-TRIM

VINYL FASCIA

SOFFIT COVE MOULDING*

*DELUXE CROWN MOULDING MAY BE USED AS AN ALTERNATE TO SOFFIT COVE MOULDING.

SOLID & FULL VENT PERFORATED

2-5" exposure per panel
12' long
20 pcs. per ctn.
2 squares per ctn.



- ▶ .040" Panel thickness with a natural matte pattern
- ▶ Available solid and full vent perforated
- ▶ Full vent ventilation specifications:
 - Net free ventilation area per linear foot - 4.0 sq. in.
 - Percentage of ventilated surface area per linear foot: - 3.33%
- ▶ 1/2" Panel projection
- ▶ Matching or contrasting colors to complement a home's exterior
- ▶ Limited Lifetime Transferable Warranty with **ColorHold®** Lifetime Fade Protection

D5 Select cannot be used in vertical applications.

T4 Matte

VINYL SOFFIT

Natural Matte Pattern



Full Vent

Center Vent
Available in white only

Solid



Profile & Color Shown: Full Vent, White

27 HOMEOWNER PREFERRED COLORS

WHITE*	SANDSTONE	GRAPHITE
LINEN	TUMBLEWEED	MYRTLE NEW!
BEIGE	SIERRA	DOVE GRAY NEW!
CHAMPAGNE	COBBLESTONE	SILVER
ALMOND	MOCHA	GRANITE
CREAM	RUSSET	SEAPORT
TAN	MUSKET BROWN	GENEVA BLUE NEW!
WHEAT	ROYAL BROWN	STEEL BLUE
SAND	MAVERICK BROWN	DEEP WATER NEW!

Colors are mechanically reproduced. For color accuracy, please see actual product sample.

*Center Vent profile available in White only.

PREMIUM COLOR

DESIGNER COLLECTION COLOR

SOLID, CENTER VENT PERFORATED & FULL VENT PERFORATED

3-4" exposure per panel
12' long
16 pcs. per ctn.
1.92 squares per ctn.

- ▶ .038" Panel thickness with a natural matte pattern
- ▶ Available solid, center and full vent perforated
- ▶ Ventilation specifications:
 - Net free ventilation area per linear foot
 - Center vent - 1.9 sq. in.
 - Full vent perforated - 5.7 sq. in.
 - Percentage of ventilated surface area per linear foot:
 - Center vent - 1.32%
 - Full vent perforated - 3.96%
- ▶ 1/2" Panel projection
- ▶ Limited Lifetime Transferable Warranty with **ColorHold®** Lifetime Fade Protection

T4 Matte cannot be used in vertical applications.



Natural Woodgrain Pattern

T4 Select

VINYL SOFFIT




Profile & Color Shown: Solid & Full Vent, White

WHITE*

Colors are mechanically reproduced. For color accuracy, please see actual product sample.

SOLID & FULL VENT PERFORATED

3-4" exposure per panel
12' long
16 pcs. per ctn.
1.92 squares per ctn.

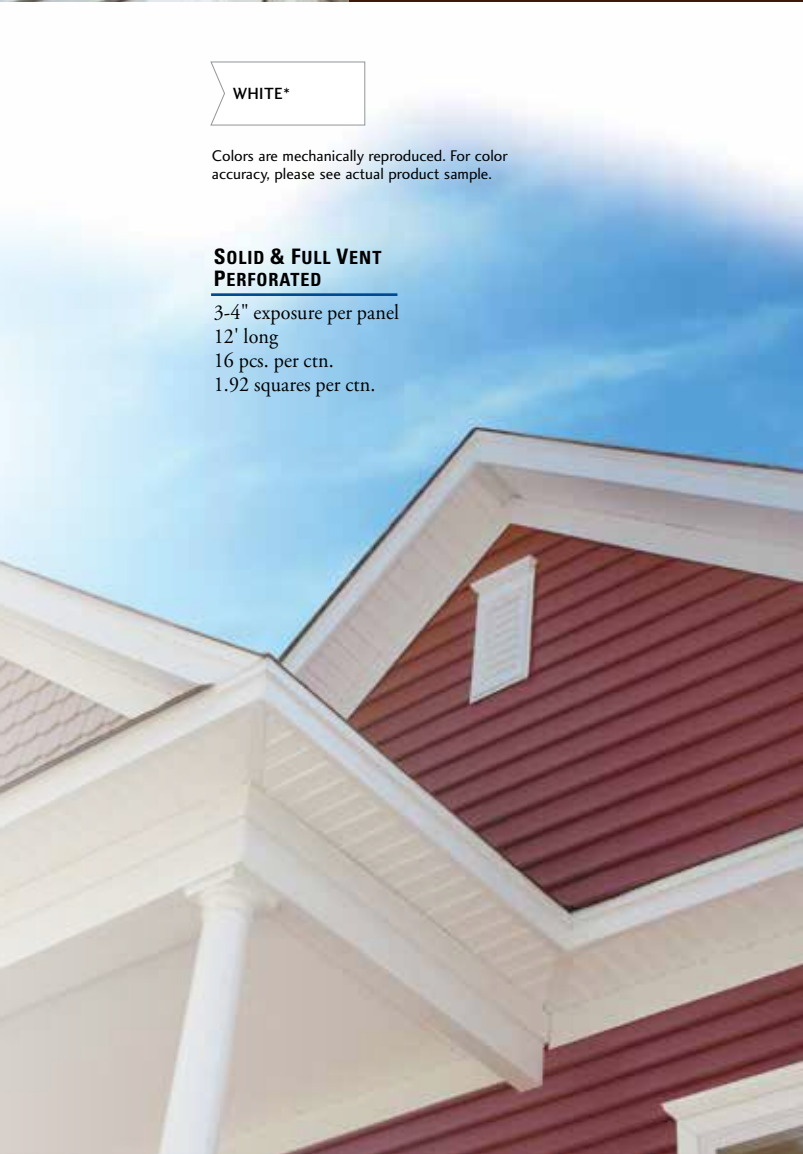

Solid



Full Vent



- ▶ .038" Panel thickness with a natural woodgrain pattern
- ▶ Available solid and full vent
- ▶ Full vent ventilation specifications:
 - Net free ventilation area per linear foot - 5.7 sq. in.
 - Percentage of ventilated surface area per linear foot: - 3.96%
- ▶ 1/2" Panel projection
- ▶ Limited Lifetime Transferable Warranty with **ColorHold®** Lifetime Fade Protection

T4 Select cannot be used in vertical applications.




VINYL FASCIA

12' long
25 pcs. per ctn.
300 linear ft. per ctn.




DELUXE CROWN MOULDING

12' 6" long
14 pcs. per ctn.
175 linear ft. per ctn.




3/4" & 1-1/4" INSIDE CORNER POST

10' long
10 pcs. per ctn.
100 linear ft. per ctn.

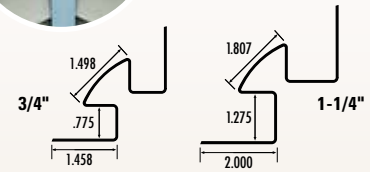


3/4" WINDOW & DOOR CASING

12' 6" long
20 pcs. per ctn.
250 linear ft. per ctn.





1/2" & 3/4" F CHANNEL

12' 6" long
24 pcs. per ctn.
300 linear ft. per ctn.





DRIP CAP

12' long
40 pcs. per ctn.
480 linear ft. per ctn.





1/2" & 3/4" H-TRIM

12' 6" long
10 pcs. per ctn.
125 linear ft. per ctn.

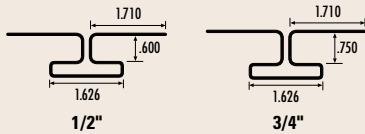

SOFFIT COVE MOULDING

12' 6" long
20 pcs. per ctn.
250 linear ft. per ctn.




STARTER STRIP

12' 6" long
50 pcs. per ctn.
625 linear ft. per ctn.



STARTER STRIP (FOR POLAR WALL® PLUS)

12' 6" long
24 pcs. per ctn.
300 linear ft. per ctn.




WIDE CORNER/WINDOW AND DOOR SURROUND SYSTEMS




SURROUND STARTER

12' 6" long
24 pcs. per ctn.
300 linear ft. per ctn.




6" FLUTED OUTSIDE CORNER POST WITH FOAM

20' long
3/4" receiving pocket
4 pcs. per ctn.
80 linear ft. per ctn.



5-1/2" OUTSIDE CORNER POST WITH FOAM


20' long
1-1/4" receiving pocket
6 pcs. per ctn.
80 linear ft. per ctn.







UTILITY TRIM

12' 6" long
40 pcs. per ctn.
500 linear ft. per ctn.





DUAL UTILITY TRIM

12' 6" long
12 pcs. per ctn.
150 linear ft. per ctn.



45° BAY OUTSIDE CORNER POST

10' long
3/4" receiving pocket
10 pcs. per ctn.
100 linear ft. per ctn.




3-1/2" UNIVERSAL OUTSIDE CORNER POST

10' long
3/4" receiving pocket
10 pcs. per ctn.
100 linear ft. per ctn.


3-1/2" UNIVERSAL OUTSIDE CORNER POST

12' long
3/4" receiving pocket
10 pcs. per ctn.
120 linear ft. per ctn.



3-1/2" OUTSIDE CORNER POST WITH FOAM

12' long
1-1/4" receiving pocket
10 pcs. per ctn.
120 linear ft. per ctn.



With foam for added rigidity & energy efficiency








3/8", 1/2", 5/8" & 3/4" J CHANNEL

12' 6" long
40 pcs. per ctn.
500 linear ft. per ctn.


1-1/4" J CHANNEL

12' 6" long
24 pcs. per ctn.
300 linear ft. per ctn.




3/4" FLEXIBLE J CHANNEL


12' 6" long
20 pcs. per ctn.
250 linear ft. per ctn.



See page 32 for color availability




3-1/2" FLAT LINEAL/SURROUND



5-1/2" FLAT LINEAL/SURROUND


FLAT LINEAL SURROUND

20' long
10 pcs. per ctn.
200 linear ft. per ctn.



BEADED CORNER INSERT

20' long
10 pcs. per ctn.
200 linear ft. per ctn.



NORANDEX VINYL SIDING

NORANDEX VINYL SOFFIT


	RUSTIC HILL 7" TRADITIONAL SHAKE	RUSTIC HILL 5" DOUBLE CAPE COD SHINGLE	POLAR WALL PLUS D4	POLAR WALL PLUS D5DL	POLAR WALL PLUS D6	SAGEBRUSH D4	SAGEBRUSH D5DL	GREAT BARRIER D4, D4XL	GREAT BARRIER D5DL, D5DLXL	BOARD & BATTEN 7"	CEDAR KNOLLS D4	CEDAR KNOLLS D5	CEDAR KNOLLS D5DL	BRUSHSTROKE COLLECTION CAMBRIDGE BEADED	BRUSHSTROKE COLLECTION SHENANDOAH BEADED	BRUSHSTROKE COLLECTION SHENANDOAH T3	WOODSMAN SELECT D4	WOODSMAN SELECT D4DL	WOODSMAN SELECT D5	WOODSMAN SELECT D5DL	SUMMIT MANOR D4	SUMMIT MANOR D4-1/2	SUMMIT MANOR D4-1/2DL	D5 PREMIUM SOLID	D5 PREMIUM HIDDEN RIDGE	D5 PREMIUM FULL VENT LANCED	D5 SELECT SOLID	D5 SELECT PERFORATED	T4 MATTE SOLID	T4 MATTE FULL VENT	T4 MATTE CENTER VENT	T4 SELECT SOLID	T4 SELECT FULL VENT	BEADED PORCH SOLID	BEADED PORCH CENTER VENT						
STANDARD COLORS																																									
WHITE	▲	▲	▲	▲	▲	▲	▲	▲	▲		▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲			
SILVER	▲	▲	▲	▲	▲	▲	▲	▲	▲		▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲			
LINEN			▲	▲	▲	▲	▲	▲	▲					▲	▲	▲						▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲				
BEIGE	▲	▲									▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲			
CHAMPAGNE	▲	▲	▲	▲	▲	▲	▲	▲	▲		▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲			
ALMOND			▲	▲	▲	▲	▲	▲	▲					▲	▲	▲						▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲			
CREAM	▲	▲	▲	▲	▲	▲	▲	▲	▲		▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲			
YELLOW			▲	▲	▲	▲	▲	▲	▲		▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
TAN	▲	▲	▲	▲	▲	▲	▲	▲	▲					▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
WHEAT	▲	▲									▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
SANDSTONE	▲	▲									▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
CACTUS	▲	▲									▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
PREMIUM COLORS																																									
SAND	▲	▲												▲	▲	▲						▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲		
TUMBLEWEED	▲	▲	▲	▲	▲	▲	▲	▲	▲					▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	
SIERRA	▲	▲									▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	
MOCHA	▲	▲	▲	▲	▲			▲	▲	▲	▲	▲	▲				▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	
COBBLESTONE			▲	▲	▲	▲	▲	▲	▲																▲	▲			▲	▲											
KHAKI	▲	▲	▲	▲	▲			▲	▲		▲	▲	▲				▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	
OLIVE	▲	▲	▲	▲	▲			▲	▲		▲	▲	▲				▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	
IVY			▲	▲	▲	▲	▲	▲	▲															▲	▲																
DOVE GRAY																						▲	▲	▲					▲	▲											
FERN											▲	▲	▲				▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	
SMOKE	▲	▲	▲	▲	▲			▲	▲	▲	▲	▲	▲				▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	
GRANITE	▲	▲	▲	▲	▲	▲	▲	▲	▲		▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	
GENEVA BLUE											▲	▲	▲				▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	
WEDGEWOOD	▲	▲	▲	▲	▲	▲	▲	▲	▲					▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
DESIGNER COLLECTION																																									
RUSSET	▲	▲	▲	▲	▲			▲	▲	▲	▲	▲	▲				▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	
MAVERICK BROWN	▲	▲									▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	
GRAPHITE	▲	▲			▲			▲	▲	▲	▲	▲	▲				▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
ROYAL BROWN																																									
MUSKET BROWN																																									
FIREBRICK				▲			▲	▲	▲	▲	▲	▲	▲																												
EVERGREEN				▲			▲	▲	▲	▲	▲	▲	▲																												
MYRTLE	▲	▲					▲	▲	▲	▲	▲	▲	▲																												
SEAPORT	▲	▲									▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
DEEP WATER	▲	▲									▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
STEEL BLUE	▲	▲			▲			▲	▲	▲	▲	▲	▲				▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲

NORANDEX SIDING & SOFFIT ACCESSORIES

FINISH WORKS® WIDE CORNER/WINDOW AND DOOR SURROUND SYSTEMS

STANDARD COLORS	VINYL FASCIA	DELUXE CROWN MOULDING	3/4" INSIDE CORNER POST	1-1/4" INSIDE CORNER POST	3/4" WINDOW & DOOR CASING	1/2" F CHANNEL	3/4" F CHANNEL	DRIP CAP	1/2" H TRIM	3/4" H TRIM	SOFFIT COVE MOULDING	STARTER STRIP	STARTER STRIP (FOR POLAR WALL® PLUS)	UTILITY TRIM	DUAL UTILITY TRIM	3-1/2" UNIVERSAL OUTSIDE CORNER POST (10)	3-1/2" UNIVERSAL OUTSIDE CORNER POST (12)	3-1/2" OUTSIDE CORNER POST WITH FOAM	45° BAY OUTSIDE CORNER POST	3/8" J CHANNEL	1/2" J CHANNEL	5/8" J CHANNEL	3/4" J CHANNEL	1-1/4" J CHANNEL	3/4" FLEXIBLE J CHANNEL	SURROUND STARTER	6" FLUTED OUTSIDE CORNER POST W/FOAM	5-1/2" OUTSIDE CORNER POST WITH FOAM	3-1/2" FLAT LINEAL/SURROUND	5-1/2" FLAT LINEAL/SURROUND	BEADED CORNER INSERT	
WHITE	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
SILVER			▲	▲										▲	▲	▲	▲	▲														
LINEN			▲	▲		▲								▲		▲	▲	▲												▲	▲	▲
BEIGE			▲			▲								▲	▲	▲	▲	▲														
CHAMPAGNE			▲	▲		▲								▲	▲	▲	▲	▲														
ALMOND			▲	▲		▲								▲		▲	▲	▲											▲	▲	▲	
CREAM			▲	▲		▲								▲	▲	▲	▲	▲														
YELLOW														▲	▲	▲	▲	▲														
TAN			▲	▲		▲								▲	▲	▲	▲	▲														
WHEAT			▲			▲								▲	▲	▲	▲	▲														
SANDSTONE			▲			▲								▲	▲	▲	▲	▲														
CACTUS			▲											▲	▲	▲	▲	▲														
PREMIUM COLORS																																
SAND			▲			▲								▲	▲	▲	▲	▲														
TUMBLEWEED			▲	▲		▲								▲	▲	▲	▲	▲														
SIERRA			▲			▲								▲	▲	▲	▲	▲		▲	▲	▲	▲	▲	▲	▲	▲			▲	▲	
MOCHA			▲	▲		▲								▲	▲	▲	▲	▲														
COBBLESTONE			▲	▲		▲								▲	▲	▲	▲	▲														
KHAKI			▲	▲		▲								▲	▲	▲	▲	▲														
OLIVE			▲	▲		▲								▲	▲	▲	▲	▲														
IVY			▲	▲			▲							▲	▲	▲	▲	▲														
DOVE GRAY			▲	▲		▲								▲	▲	▲	▲	▲														
FERN			▲	▲		▲								▲	▲	▲	▲	▲														
SMOKE			▲	▲		▲								▲	▲	▲	▲	▲														
GRANITE			▲	▲		▲								▲	▲	▲	▲	▲														
GENEVA BLUE			▲	▲		▲								▲	▲	▲	▲	▲														
WEDGEWOOD			▲	▲		▲								▲	▲	▲	▲	▲														
DESIGNER COLLECTION																																
RUSSET			▲	▲		▲								▲	▲	▲	▲	▲														
MAVERICK BROWN			▲			▲								▲	▲	▲	▲	▲														
GRAPHITE			▲	▲		▲								▲	▲	▲	▲	▲														
ROYAL BROWN						▲																										
MUSKET BROWN						▲																										
FIREBRICK			▲	▲										▲	▲	▲	▲	▲														
EVERGREEN			▲	▲										▲	▲	▲	▲	▲														
MYRTLE			▲	▲		▲								▲	▲	▲	▲	▲														
SEAPORT			▲			▲								▲	▲	▲	▲	▲														
DEEP WATER			▲			▲								▲	▲	▲	▲	▲														
STEEL BLUE			▲	▲		▲								▲	▲	▲	▲	▲														
NON COLOR SPECIFIC												▲	▲																			


FINISHING TOUCHES




SOFFIT



RAIN CARRYING SYSTEMS




SIDING



TRIM/ ACCESSORIES



CORNER SYSTEMS



DOORS & DOOR SYSTEMS



WINDOWS & WINDOW SYSTEMS



FANFOLD & HOUSEWRAP

EVERYTHING YOU NEED TO MAKE A LASTING IMPRESSION

You believe, and we agree, there's no such thing as an "ordinary" job.

Every home you build or remodel presents its own unique challenges, and an opportunity to show off your workmanship. You choose products for the exterior of a home that not only perform to the highest standards, but help make a home stand out.

Norandex offers a variety of exterior products for the home giving builders and remodelers almost limitless design options. Vinyl siding, soffit and trim pieces, in colors ranging from subtle to bold, to create a finish that's unique and appealing. And, windows, doors and numerous other products that add beauty, dimension and enhancement to a home.

The best way to make a lasting impression is to use products that are designed, manufactured and warranted for a lifetime. That's why many of the leading professionals in the building products industry choose Norandex products.

PRODUCT SPECIFICATIONS

All products also meet or exceed the color retention requirements of ASTM D-7856. Products will resist major color changes in a variety of climates, based on two-year outdoor weathering studies. Where not defined in ASTM D-3679 and D-7856, our products also meet the stringent quality controls standards of Norandex.

PRODUCT TEST DATA

- Impact Resistance Mean Failure Energy >60 in. lb.
- Surface Distortion None at 120°F
- Length Within - 1/4" of specification
- Warp/Camber <1/8"
- Coefficient of Linear Expansion (in/in/°F) <4.5 x 10⁻⁵

FIRE RESISTANCE

All vinyl siding, soffit and accessories listed in this catalog have a Class A flame spread classification per 2012 IBC.

ASTM E-84:

- Flame Spread Index ≤ 25
- Smoke Developed Index >450
- Fuel Contribution 0

For more information, obtain a brochure on the fire properties of siding by contacting the Vinyl Siding Institute at www.vinylsiding.org.

RELEVANT CODES AND REGULATIONS COMPLIANCE†

- ASTM D-3679, ASTM D-7856, ASTM D-4477, ASTM D-7793
- Florida Building Code Approval FL-12500, FL-12505
- Texas Department of Insurance EC-75
- Code Compliance Research Report #0184

†Not all products listed on this page comply with these codes, please see individual Certificates of Conformance for actual product specifications.



COMPLEMENT YOUR NEW SIDING WITH
OTHER QUALITY EXTERIOR PRODUCTS



Your home deserves the best. That's why, in addition to siding, we offer other top quality products to beautify and protect your home. Whether it's entry doors, energy-efficient windows, soffit, trim, or metals, you can rest comfortably knowing you've finished your home with performance products that are among the best the industry has to offer.



1-800-528-0942
www.norandex.com