



Building on our past for the future.

LP® Building Products has been leading the way in innovative building materials for more than 30 years. From our complete line of LP® SmartSide® siding to our engineered wood and radiant barrier products, professional builders choose LP for unparalleled quality and performance.

Table of Contents	
Trim	
SmartSide Trim	$\dots 4$
Siding	
Architectural Collection	6
Precision Series	12
Foundations	16
Warranty	
Warranty	19

Real Craftsmanship Through Technology

LP SmartSide products combine the beauty of cedar grain and outstanding performance. Our proprietary SmartGuard® process helps prevent delamination, moisture, rot and termite damage. LP SmartSide products are also 100% silica-free, have no knots or other natural defects and cut just like real wood. And since LP SmartSide products **weigh significantly less** than fiber cement, installation cost and time may be significantly reduced.



With over 10 years of sales history and 5 billion square feet in the market, LP SmartSide products are the next generation of siding.

Warranty

LP® SmartSide® products come backed with one of the most competitive warranties in the market today: A 5/50 year limited warranty provides a 5-year, 100% labor and replacement feature and a 50-year warranty on the product



LP SmartSide Trim & Siding

A COMPLETE FAMILY OF PRODUCTS

Today, LP SmartSide products are available in four lines that are decay and termite resistant and provide performance, beauty and choice.

Our extensive **SmartSide Trim** line offers a full range of versatile options in fiber and strand substrates, including reversible, cedar and smooth textures, narrow widths and 20' lengths.

The **Architectural Collection** offers a variety of unique siding solutions, including cedar shakes, colonial beaded lap and reverse board & batten. The Architectural Collection is available in a fiber substrate, excluding vented soffit, which is a strand substrate.

The **Precision Series** strand substrate line of products includes time-tested and proven durable composite wood lap siding, as well as structurally rated panels that can be applied directly to stud.

The **Foundations** fiber substrate line of products provides the essentials to finish a home with a look that will endure over time.



2

LP® SmartSide® Trim

Your Home, Your Style

LP SmartSide trim and fascia beautify homes in a wide variety of styles. Choose from a variety of lengths and textures including our Reversible Trim with one side of each — doubling your options while reducing inventory requirements.

Reversible

Two Premium Looks

- The natural look of cedar on one side and smooth on the other
- Interior or exterior use, including corner boards, windows and doors
- Pre-primed for exceptional paint adhesion
- 16' length results in faster installation
- Available in fiber substrate

LP SMARTSIDE 440 SERIES REVERSIBLE TRIM LP SMARTSIDE 540 SERIES REVERSIBLE TRIM





TEXTURE	LENGTH	ACTUAL WIDTH	ACTUAL THICKNESS
REVERSIBLE	16 ft. (192 in.)(4877 mm)	2.7 IN. (69 MM)	0.625 IN. (19 MM)
	8 ft. (96 in.)(2438 mm)	3.5 IN. (90 мм)	0.625 IN. (19 MM) OR 0.910 IN. (24 MM)
	12 FT. (144 IN.)(3657 MM)	3.5 IN. (90 мм)	0.625 IN. (19 MM) OR 0.910 IN. (24 MM)
	16 ft. (192 in.)(4877 mm)	3.5 IN. (90 мм)	0.625 IN. (19 MM) OR 0.910 IN. (24 MM)
	16 ft. (192 in.)(4877 mm)	4.5 IN. (115 MM)	0.910 IN. (24 MM)
	16 ft. (192 in.)(4877 mm)	5.5 IN. (140 MM)	0.625 IN. (19 MM) OR 0.910 IN. (24 MM)
	16 ft. (192 in.)(4877 mm)	7.21 IN. (185 MM)	0.625 IN. (19 MM) OR 0.910 IN. (24 MM)
	16 FT. (192 IN.) (4877 MM)	9.21 IN. (235 MM)	0.625 IN. (19 MM) OR 0.910 IN. (24 MM)
	16 FT. (192 IN.)(4877 MM)	11.21 IN. (286 MM)	0.625 IN. (19 MM) OR 0.910 IN. (24 MM)

TEXTURE	LENGTH	ACTUAL WIDTH	ACTUAL THICKNESS	
Ploughed Fascia Cedar	16 ft. (192 in.) (4877 mm)	5.5 IN. (140 MM)	0.625 IN. (15 MM)	
	16 ft. (192 in.) (4877 mm)	7.21 IN. (185 MM)	0.625 IN. (15 MM)	
PLOUGHED FASCIA SMOOTH	16 FT. (192 IN.) (4877 MM)	5.5 IN. (140 MM)	0.625 IN. (15 MM)	
	16 FT. (192 IN.) (4877 MM)	7.21 IN. (185 MM)	0.625 IN. (15 MM)	

Cedar

- Interior or exterior use, including corner boards, windows and doors
- Narrow widths save cutting time with no ripped edges to re-prime
- Pre-primed for exceptional paint adhesion
- 16' length results in faster installation
- Available in strand substrate

LP SMARTSIDE 440 SERIES TRIM



LP SMARTSIDE 190 SERIES TRIM



LP SMARTSIDE 540 SERIES TRIM



LP SMARTSIDE 2000 SERIES TRIM





LP SMARTSIDE 440 SERIES FASCIA



TEXTURE	LENGTH	ACTUAL WIDTH	ACTUAL THICKNESS
CEDAR	16 FT. (192 IN.)(4877 MM)	1.5 ін. (38 мм)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	16 FT. (192 IN.)(4877 MM)	2.5 IN. (63 MM)	0.530 IN. (13.46 MM), 0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	10 FT. (120 IN.)(3048 MM)	3.5 IN. (89 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	12 FT. (144 IN.)(3657 MM)	3.5 ін. (89 мм)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	16 FT. (192 IN.)(4877 MM)	3.5 IN. (89 MM)	0.530 IN. (13.46 MM), 0.625 IN. (15 MM), 0.910 IN.(23 MM) OR 1.375 IN. (35 MM)
	16 FT. (192 IN.)(4877 MM)	4.5 IN. (114 MM)	0.530 IN. (13.46 MM), 0.625 IN. (15 MM), 0.910 IN.(23 MM) OR 1.375 IN. (35 MM)
	10 FT. (120 IN.)(3048 MM)	5.5 IN. (140 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	12 FT. (144 IN.)(3657 MM)	5.5 IN. (140 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	16 FT. (192 IN.)(4877 MM)	5.5 IN. (140 MM)	0.530 IN. (13.46 MM), 0.625 IN. (15 MM), 0.910 IN.(23 MM) OR 1.375 IN. (35 MM)
	10 FT. (120 IN.)(3048 MM)	7.21 IN. (184 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	12 FT. (144 IN.)(3657 MM)	7.21 IN. (184 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	16 FT. (192 IN.)(4877 MM)	7.21 IN. (184 MM)	0.530 in. (13.46 mm), 0.625 in. (15 mm), 0.910 in.(23 mm) or 1.375 in. (35 mm)
	10 FT. (120 IN.)(3048 MM)	9.21 IN. (235 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	12 FT. (144 IN.)(3657 MM)	9.21 IN. (235 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	16 FT. (192 IN.)(4877 MM)	9.21 IN. (235 MM)	0.625 IN. (15 MM), 0.910 IN.(23 MM) OR 1.375 IN. (35 MM)
	10 FT. (120 IN.)(3048 MM)	11.21 IN.(286 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	12 FT. (144 IN.)(3657 MM)	11.21 IN.(286 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	16 FT. (192 IN.)(4877 MM)	11.21 IN.(286 MM)	0.625 IN. (15 MM), 0.910 IN.(23 MM) OR 1.375 IN. (35 MM)
	20 FT. (240 IN.)(6096 MM)	3.5 IN. (89 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	20 FT. (240 IN.)(6096 MM)	5.5 IN. (140 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	20 FT. (240 IN.)(6096 MM)	7.21 IN. (184 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	20 FT. (240 IN.)(6096 MM)	9.21 IN. (235 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)
	20 FT. (240 IN.) (6096 MM)	11.21 IN.(286 MM)	0.625 IN. (15 MM) OR 0.910 IN.(23 MM)








Cedar Shakes

The Luxurious Look Of Real Cedar Shakes

- The look of real cedar with easy installation and less maintenance over time
- Staggered edges offer a lively, textured effect
- Can be used on an entire house or as a decorative accent with any substrate
- Shiplap edges for seamless appearance
- Available in fiber substrate

LP® SMARTSIDE® CEDAR SHAKES

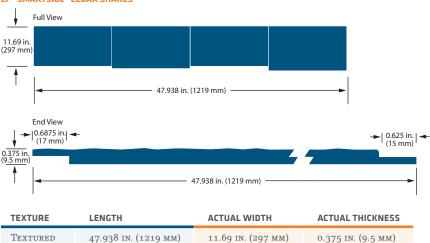







12" Bold Profiles

Genuine Detail

- Distinctive Triple 4" and Double 5" profiles
- Shiplap edges make it easier to level and apply
- Pre-primed for exceptional paint adhesion
- 16' length results in faster installation
- Available in fiber substrate



THE Share State






16" Bold Profiles

Choices That Make A Statement

- This extra-wide 16" siding comes in three profiles: Quad 4", Triple 5" and Double 8"
- Pre-primed for exceptional paint adhesion
- 16' length results in faster installation
- Available in fiber substrate

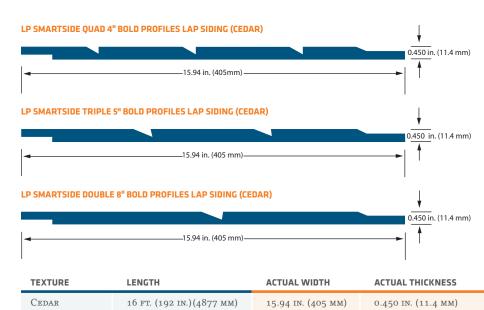








Colonial Beaded

Cutting Edge Meets Classical

- Colonial Beaded Lap siding endows homes with authentic American style
- Drip lines cast crisp shadows for maximum curb appeal
- Pre-primed for exceptional paint adhesion
- 16' length results in faster installation and fewer seams
- Available in fiber substrate

LP® SMARTSIDE® COLONIAL BEADED LAP (CEDAR)



LP SMARTSIDE COLONIAL BEADED LAP (SMOOTH)




TEXTURE	LENGTH	ACTUAL WIDTH	ACTUAL THICKNESS
CEDAR	16 ft. (192 in.)(4877 mm)	7.938 IN. (203 MM)	0.375 ін. (9.5 мм)
Ѕмоотн	16 FT. (192 IN.)(4877 MM)	7.938 IN. (203 MM)	0.375 IN. (9.5 MM)
	16 ft. (192 in.)(4877 mm)	8.938 IN. (229 MM)	0.375 ін. (9.5 мм)

Self-Aligning

Smarter Than The Average Siding

- Self-aligning lap siding that's easy to level, course after course
- Saves installation and labor time
- Pre-primed for exceptional paint adhesion
- 16' length results in faster installation
- Available in fiber substrate

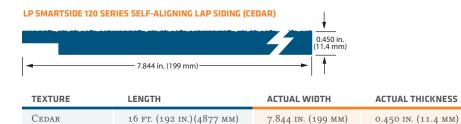












Stucco

Handcrafted Warmth At Your Fingertips

- The remarkably detailed soft, earthy, hand-troweled effect of stucco on a panel
- Deeply textured and varied from board to board
- Comes in easy-to-install shiplap edge panels
- Available pre-primed or pre-finished in white
- Not rated for structural use
- Available in fiber substrate

LP SMARTSIDE STUCCO PANEL



TEXTURE	LENGTH	ACTUAL WIDTH	ACTUAL THICKNESS
Stucco	8 ft. (96 in.)(2438 mm)	48.563 IN. (1234 MM)	0.375 IN. (9.5 MM)
	9 ft. (108 in.)(2743 mm)	48.563 IN. (1234 MM)	0.375 IN. (9.5 MM)
STUCCO (PRE-FINISHED WHITE)	8 ft. (96 in.) (2438 mm)	48.563 IN. (1234 MM)	0.375 IN. (9.5 ММ)






Reverse Board And Batten

Capture The Resilient Spirit Of Historic Architecture

- Rustic and cross-sawn, Reverse Board and Batten panel siding sports the weathered grain appearance of cedar
- Available in 8' and 9' lengths
- Shiplap edges make it easier to level and apply
- Pre-primed for exceptional paint adhesion
- Not rated for structural use
- Available in fiber substrate

LP SMARTSIDE REVERSE BOARD AND BATTEN PANEL 12 IN. O.C.



TEXTURE	LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	ACTUAL THICKNESS	
CEDAR	8 ft. (96 in.)(2438 mm)	12 IN. O.C.	1 IN. (25.4 MM)	48.563 in. (1234 mm)	0.375 IN. (9.5 MM)	
	9 FT. (108 IN.)(2743 MM)	12 IN. O.C.	1 IN. (25.4 MM)	48.563 IN. (1234 MM)	0.375 IN. (9.5 MM)	








9

Vented Soffit

Let Air In And Keep Bees Out

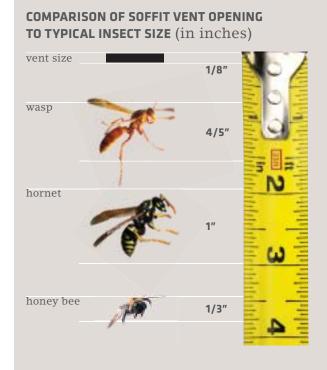


Each piece comes with precisely cut vents offering 10 square inches of ventilation per linear foot.

Engineered To Cut Out Problems

- The perfect alternative to MDO, plywood or hand-installed metal vents
- Precisely cut vents offer 10 square inches of ventilation per linear foot, making it easier to meet code requirements while adding architectural beauty
- Designed to minimize paint build-up and promote continuous airflow
- Vents are as small as International Building Codes allow (1/8"), to keep hornets and bees out
- Eliminates time spent ripping full sheets
- Available in strand substrate

LP® SMARTSIDE® CUT-TO-WIDTH VENTED SOFFIT



	TEXTURE	LENGIH	ACTUAL WIDTH	ACTUAL THICKNESS
ĺ	CEDAR	16 ft. (192 in.)(4877 mm)	7.938 IN. (201 MM)	0.315 IN. (8 мм)
		16 ft. (192 in.)(4877 mm)	11.938 ім. (303 мм)	0.315 IN. (8 MM)
		16 FT. (192 IN.) (4877 MM)	15.938 ін. (405 мм)	0.315 IN. (8 MM)
		16 FT. (192 IN.)(4877 MM)	23.938 ін. (608 мм)	0.315 IN. (8 MM)





Lap

The Natural Look Of Cedar Without The Cost

- One of the most durable lap siding options in the market today
- 16' length results in faster installation
- Up to 33% fewer seams than traditional 12' siding

16 FT. (192 IN.)(4877 MM)


- Pre-primed for exceptional paint adhesion
- Self-aligning SmartLock™ option installs faster and more efficient
- Available in strand substrate

Smartlock Cedar

12





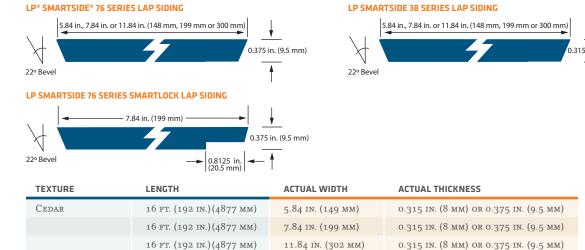

Panel

A Panel So Strong It's Rated For Structural Use By The Engineered Wood Association


- Shiplap edge with advanced bead system for easier alignment
- Pre-primed for exceptional paint adhesion
- Significantly lighter than comparable fiber cement panel
- Strong enough to be nailed directly to stud, making additional sheathing unnecessary in many applications
- Eliminates need for additional bracing on load-bearing walls
- Ideal exterior for homes in areas of high winds or seismic activity
- Available in strand substrate





13


LP SMARTSIDE 38 SERIES PANEL (NO GROOVE)




LP SMARTSIDE 76 SERIES PANEL (NO GROOVE)




LP SMARTSIDE 190 SERIES PANEL (NO GROOVE)




LP SMARTSIDE 38 SERIES PANEL 8 IN. O.C.



LP SMARTSIDE 76 SERIES PANEL 4 IN. & 8 IN. O.C.




LP SMARTSIDE 190 SERIES PANEL 8 IN. O.C.



TEXTURE	LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	ACTUAL THICKNESS
CEDAR	8 ft. (96 in.)(2438 mm)	NO GROOVE	N/A	48.563 IN. (1234 MM)	0.315 in. (8 mm), 0.375 in. (9.5 mm) or 0.530 in. (13.46 mm)
	9 ft. (108 in.)(2743 mm)	NO GROOVE	N/A	48.563 IN. (1234 MM)	0.375 IN. (9.5 MM) OR 0.530 IN. (13.46 MM)
	10 FT. (120 IN.)(3048 MM)	NO GROOVE	N/A	48.563 IN. (1234 MM)	0.315 IN. (8 MM), 0.375 IN. (9.5 MM) OR 0.530 IN. (13.46 MM)
	12 FT. (144 IN.)(3657 ММ)	NO GROOVE	N/A	48.563 IN. (1234 MM)	0.315 IN. (8 MM)
	8 ft. (96 in.)(2438 mm)	4 IN. O.C.	3/8 IN. (13 MM)	48.563 IN. (1234 MM)	0.375 IN. (9.5 MM) OR 0.530 IN. (13.46 MM)
	9 ft. (108 in.)(2743 mm)	4 IN. O.C.	3/8 IN. (13 MM)	48.563 IN. (1234 MM)	0.375 IN. (9.5 MM) OR 0.530 IN. (13.46 MM)
	10 FT. (120 IN.)(3048 MM)	4 IN. O.C.	3/8 IN. (13 MM)	48.563 IN. (1234 MM)	0.375 IN. (9.5 MM) OR 0.530 IN. (13.46 MM)
	6 ft. (72 in.)(1829 mm)	8 IN. O.C.	3/8 IN. (13 MM)	48.563 IN. (1234 MM)	0.315 IN. (8 MM) OR 0.375 IN. (9.5 MM)
	7 FT. (84 IN.)(2134 MM)	8 IN. O.C.	3/8 IN. (13 MM)	48.563 IN. (1234 MM)	0.315 IN. (8 MM) OR 0.375 IN. (9.5 MM)
	8 ft. (96 in.)(2438 mm)	8 IN. O.C.	3/8 IN. (13 MM)	48.563 IN. (1234 MM)	0.315 IN. (8 MM), 0.375 IN. (9.5 MM) OR 0.530 IN. (13.46 MM)
	9 FT. (108 IN.)(2743 MM)	8 IN. O.C.	3/8 IN. (13 MM)	48.563 IN. (1234 MM)	0.315 IN. (8 MM), 0.375 IN. (9.5 MM) OR 0.530 IN. (13.46 MM)
	10 FT. (120 IN.)(3048 MM)	8 IN. O.C.	3/8 IN. (13 MM)	48.563 IN. (1234 MM)	0.315 IN. (8 MM), 0.375 IN. (9.5 MM) OR 0.530 IN. (13.46 MM)

LP SMARTSIDE SMOOTH PANEL FOR CARRARA STUCCO USE ONLY



DISCLAIMER: THIS PRODUCT MUST BE USED WITH CARRARA STUCCO SYSTEM

LENGTH	GROOVE	ACTUAL WIDTH	ACTUAL THICKNESS
8 ft. (96 in.)(2438 mm)	NO GROOVE SQUARE EDGE	47.88 IN. (1216 MM)	0.315 IN. (8 MM), 0.375 IN. (9.5 MM)

Soffit

The Finishing Touch

- The perfect alternative to MDO and plywood soffits
- Cut-to-width eliminates time spent ripping full sheets
- Engineered for closed soffit applications
- The 76 Series and 190 Series are ideal for use as the starter course for roofs with exposed soffits
- Available in strand substrate





LP® SMARTSIDE® 4'X8' SOFFIT (TEXTURED AND SMOOTH)

0.530 in. (13.46 mr

LP SMARTSIDE 190 SERIES 4'X8' SOFFIT







↓	
0.375 in. (9.5 mm)	47
1	15.93 in. or 23.93 in. (405 mm or 608 mm)

TEXTURE	LENGTH	ACTUAL WIDTH	ACTUAL THICKNESS
CEDAR	16 гт. (192 IN.) (4877 мм)	7.93 IN. (201 MM)	0.315 IN. (8 MM)
	16 ft. (192 in.)(4877 mm)	11.93 IN. (303 MM)	0.315 IN. (8 MM)
	16 ft. (192 in.)(4877 mm)	11.93 IN. (303 MM)	0.375 IN. (9.5 MM)
	16 ft. (192 in.)(4877 mm)	15.93 IN. (405 MM)	0.315 IN. (8 мм)
	16 ft. (192 in.)(4877 mm)	23.93 ім. (608 мм)	0.315 IN. (8 мм)
	16 ft. (192 in.)(4877 mm)	23.93 ім. (608 мм)	0.375 IN. (9.5 MM)
	8 ft. (96 in.)(2438 mm)	47.875 IN. (1216 MM)	0.315 IN. (8 мм)
	8 ft. (96 in.)(2438 mm)	47.875 IN. (1216 MM)	0.375 IN. (9.5 MM)
	8 ft. (96 in.)(2438 mm)	47.875 IN. (1216 MM)	0.530 ін. (13.46 мм)
Ѕмоотн	8 ft. (96 in.)(2438 mm)	47.875 IN. (1216 MM)	0.315 IN. (8 мм)
	8 ft. (96 in.)(2438 mm)	47.875 IN. (1216 MM)	0.375 IN. (9.5 MM)







Cedar Lap

Durable Beauty

- The natural look of cedar
- Pre-primed for exceptional paint adhesion
- 16' length results in faster installation
- Available in fiber substrate



TEXTURE	LENGTH	ACTUAL WIDTH	ACTUAL THICKNESS	
CEDAR	16 ft. (192 in.)(4877 mm)	5.84 ін. (148 мм)	0.375 IN. (9.5 MM)	
	16 ft. (192 in.)(4877 mm)	7.84 ін. (199 мм)	0.375 IN. (9.5 MM)	
	16 FT. (192 IN.)(4877 MM)	9.47 IN. (241 MM)	0.375 IN. (9.5 MM)	
	16 ft. (192 in.)(4877 mm)	11.84 IN. (301 MM)	0.375 IN. (9.5 MM)	



Smooth Lap

Understated Elegance

- Traditional look that accentuates the architectural features of any home
- Smooth texture for a clean finish
- Pre-primed for exceptional paint adhesion
- 16' length results in faster installation
- Available in fiber substrate



TEXTURE	LENGTH	ACTUAL WIDTH	ACTUAL THICKNESS
Ѕмоотн	16 ft. (192 in.)(4877 mm)	5 .84 IN. (149 MM)	0.375 ін. (9.5 мм)
	16 ft. (192 in.)(4877 mm)	7 .84 IN. (200 MM)	0.375 ін. (9.5 мм)
	16 FT. (192 IN.) (4877 MM)	11.84 IN. (302 MM)	0.375 ін. (9.5 мм)




Primed Panel


Designed For Ease And Performance

- The shiplap edge makes it easy to install
- Pre-primed for exceptional paint adhesion
- Not rated for structural use
- Available in fiber substrate
- Cedar or smooth texture

LP SMARTSIDE 76 SERIES CEDAR PANEL 8 IN. O.C.







TEXTURE	LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	ACTUAL THICKNESS
CEDAR	8 ft. (96 in.) (2438 mm)	8 IN. O.C.	3/8 ін. (9.5 мм)	48.563 IN. (1234 MM)	0.375 IN. (9.5 MM)
	9 FT. (108 IN.)(2743 MM)	8 IN. O.C.	3/8 ін. (9.5 мм)	48.563 IN. (1234 MM)	0.375 IN. (9.5 MM)
	8 ft. (96 in.)(2438 mm)	8 IN. O.C.	3/8 in. (9.5 mm)	48.563 in. (1234 mm)	0.450 IN. (11.4 MM)
	9 FT. (108 IN.)(2743 MM)	8 IN. O.C.	3/8 in. (9.5 mm)	48.563 in. (1234 mm)	0.450 IN. (11.4 MM)
Ѕмоотн	8 ft. (96 in.)(2438 mm)	8 IN. O.C.	3/8 in. (9.5 mm)	48.563 in. (1234 mm)	0.375 IN. (9.5 MM)





GROOVE WIDTH


→ 1/2" →

→ 3/8" →



Prefinished Panel

- The natural look of cedar
- Prefinished with multiple layers of paint along the edges and face surfaces
- Easy maintenance
- Not rated for structural use
- Available in fiber substrate

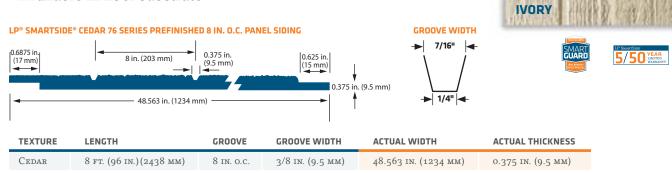

Soffit

The Perfect Match

- Installs quickly and easily
- Available in multiple sizes for extraordinary versatility

15.94 in. (404 mm), 47.94 in. (1217 mm)

- Pre-primed for exceptional paint adhesion
- Available in fiber substrate
- Cedar or smooth texture

LP SMARTSIDE 76 SERIES SOFFIT SIDING





PEARL

WHITE





LP° SmartSide° Products Warranty

Prorated 50-Year Limited Warranty

This warranty is limited to LP SmartSide lap siding, panel siding, trim and fascia, SmartFinish, SilverSide and soffit ("the Product(s)") installed on structures permanently located in the United States or Canada.

1. Warranty Coverage-Limited 50-year Warranty

Louisiana-Pacific Corporation ("LP")'s warranty is made to the original purchaser of the Product(s) ("Purchaser"); the original owner of the structure on which the Product(s) are installed; and to the next owner of that structure (together "Owner"). LP's express warranties may not be assigned to any subsequent owners of the structure. LP warrants that, at the time of manufacture, the Product(s) will be free of defects in materials and workmanship.

In addition, the Product(s) will remain free from: a) fungal degradation; b) buckling and c) cracking, peeling, separating, chipping, flaking or rupturing of the resin-impregnated surface overlay for a period of 50 years from the date application is completed, when the Product(s) has been stored, handled, applied, finished and maintained in accordance with LP's application, finishing and maintenance instructions in effect at the time of application.

LP SmartSide Precision Series 3/8" lap and panel siding product(s), LP SmartSide Precision Series 7/16" panel product(s), LP SmartSide Architectural Collection 1/2" lap product(s), LP SmartSide Foundations 7/16" lap product(s), LP SmartSide Foundations 1/2" panel product(s), LP SmartSide Foundations 1/2" Stucco and Reverse Board and Batten panel product(s) are warranted against buckling when installed up to 16" o.c. stud spacing and when stored, transported, handled and maintained in accordance with applicable LP SmartSide Application Instructions. Buckling is defined as 1/4" out of plane covering a distance no greater than 16" between studs. Waviness due to misaligned framing, crooked or bowed studs, foundation or wall settling, or improper nailing is not considered buckling. THIS WARRANTY DOES NOT COVER PERFORMANCE OF 7/16" FOUNDATIONS SIDING IN ALASKA, BRITISH COLUMBIA, HAWAII, NORTHERN CALIFORNIA NORTH OF I-80 OR WEST OF THE CASCADES IN WASHINGTON, OREGON AND CALIFORNIA.

LP SmartSide Precision Series 7/16" lap siding product(s), LP SmartSide 7/16" Architectural Collection lock lap siding product(s) and LP SmartSide Precision Series 19/32" panel product(s) are warranted against buckling when installed up to 24" o.c. stud spacing and when stored, transported, handled and maintained in accordance with applicable LP SmartSide Application Instructions. Buckling is defined as 3/8" out of plane covering a distance no greater than 24" between studs. Waviness due to misaligned framing, crooked or bowed studs, foundation or wall settling, or improper nailing is not considered buckling.

LP further warrants that the Product(s) have been treated with the borate-based SmartGuard® process during their manufacture to enhance their ability to resist structural damage due to termites and fungal decay.

2. Remedies for Breach of Limited Express Warranty

THIS SECTION 2 PROVIDES THE SOLE AND EXCLUSIVE REMEDY AVAILABLE TO A PURCHASER OR OWNER OF A STRUCTURE ON WHICH PRODUCT(S) HAS BEEN APPLIED.

In the event of a breach of this Limited Express Warranty (or of any implied warranty not otherwise disclaimed herein), LP will:

a) during the first 5 years from the date of installation, pay an amount equal to the cost (as established by an independent construction cost estimator, such as R. S. Means) of repairing or replacing any Product(s) that fails to comply with the provisions of Paragraph 1, above, or

b) during the 6th through the 49th years from the date of installation, pay an amount equal to the cost of similar wood-based replacement product (no labor or other charges shall be paid), less an annual pro rata reduction of 2.22% per year (6th year, 2.22%; 7th year, 4.44%, etc.) such that from and after the 50th year the amount payable under this warranty will be zero.

Any dispute concerning the applicability of the warranty or whether the Product(s) met the manufacturer's standards in accordance with Paragraph1 shall be submitted to binding arbitration under the Commercial Arbitration Rules of the American Arbitration Association. The jurisdiction of the arbitrator over the dispute shall be exclusive and the decision of the arbitrator shall be binding and non-appealable.

3. Exclusion of Other Remedies

IN NO EVENT WILL LP BE LIABLE FOR ANY INCIDENTAL, SPECIAL, MULTIPLE, PUNITIVE, INDIRECT OR CONSEQUENTIAL DAMAGES RESULTING FROM ANY DEFECT IN THE PRODUCT(S) SUPPLIED, INCLUDING, BUT NOT LIMITED TO, DAMAGE TO PROPERTY OR LOST PROFITS.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

4. Exclusion of All Other Warranties, Express or Implied

A. THIS LIMITED EXPRESS WARRANTY IS THE ONLY WARRANTY APPLICABLE TO THIS PRODUCT(S) AND EXCLUDE S ALL OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTIES OTHERWISE ARISING FROM THE COURSE OF DEALING OR USAGE OF TRADE OR ADVERTISING, EXCEPT WHERE SUCH WARRANTIES ARISE UNDER APPLICABLE CONSUMER PRODUCT WARRANTY LAWS, AND CANNOT BE LAWFULLY DISCLAIMED, IN WHICH EVENT SUCH WARRANTIES ARE LIMITED TO THE MAXIMUM EXTENT PERMITTED BY SUCH LAWS.

Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply to you.

B. NO OTHER EXPRESS WARRANTY HAS BEEN MADE OR WILL BE MADE ON BEHALF OF LP WITH RESPECT TO THIS PRODUCT(S).

5. Certain Damages Excluded from Warranty Coverage

This Limited Express Warranty does not cover or provide a remedy for damage that results from:

a) misuse or improper storage, handling, application, finishing or maintenance; alterations to the structure after the original application of the Product(s); acts of God, such as hurricane, tornado, hail, earthquake, flood or other similar cause beyond the control of LP; design, application or construction of the wall system on which the Product(s) is applied; transport, storage or handling of the Product(s) prior to application;

b) product(s) that is not applied, finished and maintained in strict accordance with LP's instructions in effect at the time of original application;

 c) swelling and/or edge checking. Such swelling and/or checking normally occurs in all wood products as they expand and contract in response to changes in climatic conditions;

d) termite damage which does not affect the structural integrity of the Product(s): or

e) design, application or construction of the structure on which the Product(s) is installed.

6. Responsibility of Purchaser or Owner

COMPLIANCE WITH EACH OF THE REQUIREMENTS SET OUT BELOW IN SECTIONS (A) AND (B) INCLUSIVE IS A CONDITION TO LP'S OBLIGATIONS UNDER THIS WARRANTY AND THE FAILURE TO COMPLY WITH ANY ONE OR MORE OF THE ITEMS SHALL VOID ANY RIGHTS OWNER AND PURCHASER MAY HAVE AGAINST LP:

a) Homeowners are required to register their home for warranty coverage within 60 days of installation. Warranty Registration is easy and can be accomplished in any one of three ways: 1) Mail-in Registration Cards in the units; 2) Link to LP public web site home page; 3) Phone call to customer service at 800-450-6106 requesting Registration Cards. Second homeowner will be required to provide evidence of chain of ownership of home, e.g.; Deed Transfer.

b) Any Purchaser or Owner seeking remedies under this warranty must notify LP, at the number listed below, within 30 days after discovering a possible nonconformity of the Product(s) and before beginning any permanent repair. This notice should include the date on which the Product(s) application was completed. It is the Owner's responsibility to establish the date of installation.

c) LP must be given a 60-day opportunity to inspect the siding. Upon reasonable notice, the Purchaser or Owner must allow LP's agents to enter the property and structure on which the Product(s) is applied to inspect such Product(s).

7. Governing Law

All questions concerning the meaning or applicability of this limited warranty are to be decided under the laws of the State of Tennessee without reference to its choice-of-law rules.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. $\,$

For further information, please call Customer Support at 800.450.6106, or write to: LP Corporation, 414 Union Street Suite 2000, Nashville, TN 37219

We protect great homes and great reputations.

The LP® SmartSide® family offers a complete line of exterior trim and siding products – including lap, panel, trim, fascia and soffit – that are engineered using advanced siding technology to give homeowners the traditional look of real wood while helping to protect their homes from harsh weather conditions and termites. Every step of the manufacturing process is designed to create a high-performance siding that's tough and durable, so it performs beautifully for decades.

For more information on LP SmartSide trim and siding, please visit www.lpcorp.com/smartside or call 888.820.0325.



LPCorp.com

Build With Us:

Cal. Prop 65 Warning: Use of this product may result in exposure to wood dust, known to the State of California to cause cancer.

